CATÁLOGO DE PRODUCTOS

2026



CATÁLOGO DE PRODUCTOS 2026

En NCL, conectamos empresas con soluciones confiables de energía renovable de fabricantes internacionales consolidados. Nos centramos en un servicio ágil, una coordinación de suministro segura y alianzas comerciales duraderas que ayudan a nuestros clientes a desarrollar proyectos energéticos eficientes.

Empresa:	**NCL**
Catálogo:	Colección de Productos 2026
Fecha de emisión:	15 de octubre de 2026

NUESTRA GAMA DE PRODUCTOS

Nuestra gama de módulos solares incluye paneles GCL bifaciales N-type de doble vidrio, de alta potencia, en opciones de 585 W, 590 W, 615 W y 620 W. Diseñados para instalaciones comerciales, industriales y de gran escala, estos módulos combinan una alta generación de energía, construcción robusta y rendimiento a largo plazo.

Disponibles desde Róterdam, los módulos pueden coordinarse para entrega en Mariel según los itinerarios marítimos vigentes. También podemos suministrar soluciones completas para sistemas fotovoltaicos, incluidas estructuras de montaje, inversores híbridos, baterías, cables, conectores y otros accesorios esenciales.


LISTA DE PRECIOS E INFORMACIÓN DE PEDIDOS

01. Módulos solares

Producto	Especificación	Embalaje / Cantidad	Precio mayorista
Módulo solar GCL bifacial N-type de doble vidrio	615 W; 132 células monocristalinas N-type; 2382 x 1134 x 30 mm; 32.5 kg; 1500 V DC; garantía de producto de 12 años; garantía lineal de potencia de 30 años.	36 módulos/cartón; 720 módulos por contenedor 40' HQ	EUR 88.56/módulo; EUR 3,188.16/cartón; EUR 63,763.20/contenedor
Módulo solar GCL bifacial N-type de doble vidrio	620 W; 132 células monocristalinas N-type; 2382 x 1134 x 30 mm; 32.5 kg; 1500 V DC; garantía de producto de 12 años; garantía lineal de potencia de 30 años.	36 módulos/cartón; 720 módulos por contenedor 40' HQ	EUR 89.28/módulo; EUR 3,214.08/cartón; EUR 64,281.60/contenedor
Módulo solar GCL bifacial N-type de doble vidrio	585 W; 144 células monocristalinas N-type; 2278 x 1134 x 30 mm; 31.1 kg; 1500 V DC; garantía de producto de 12 años; garantía lineal de potencia de 30 años.	36 módulos/cartón; 720 módulos por contenedor 40' HQ	EUR 84.24/módulo; EUR 3,032.64/cartón; EUR 60,652.80/contenedor
Módulo solar GCL bifacial N-type de doble vidrio	590 W; 144 células monocristalinas N-type; 2278 x 1134 x 30 mm; 31.1 kg; 1500 V DC; garantía de producto de 12 años; garantía lineal de potencia de 30 años.	36 módulos/cartón; 720 módulos por contenedor 40' HQ	EUR 84.96/módulo; EUR 3,058.56/cartón; EUR 61,171.20/contenedor

Nota: Los precios no incluyen el flete ni cargos adicionales en destino. Los costos de envío se cotizan por separado. Los precios y la disponibilidad están sujetos a confirmación.

LISTA DE PRECIOS E INFORMACIÓN DE PEDIDOS

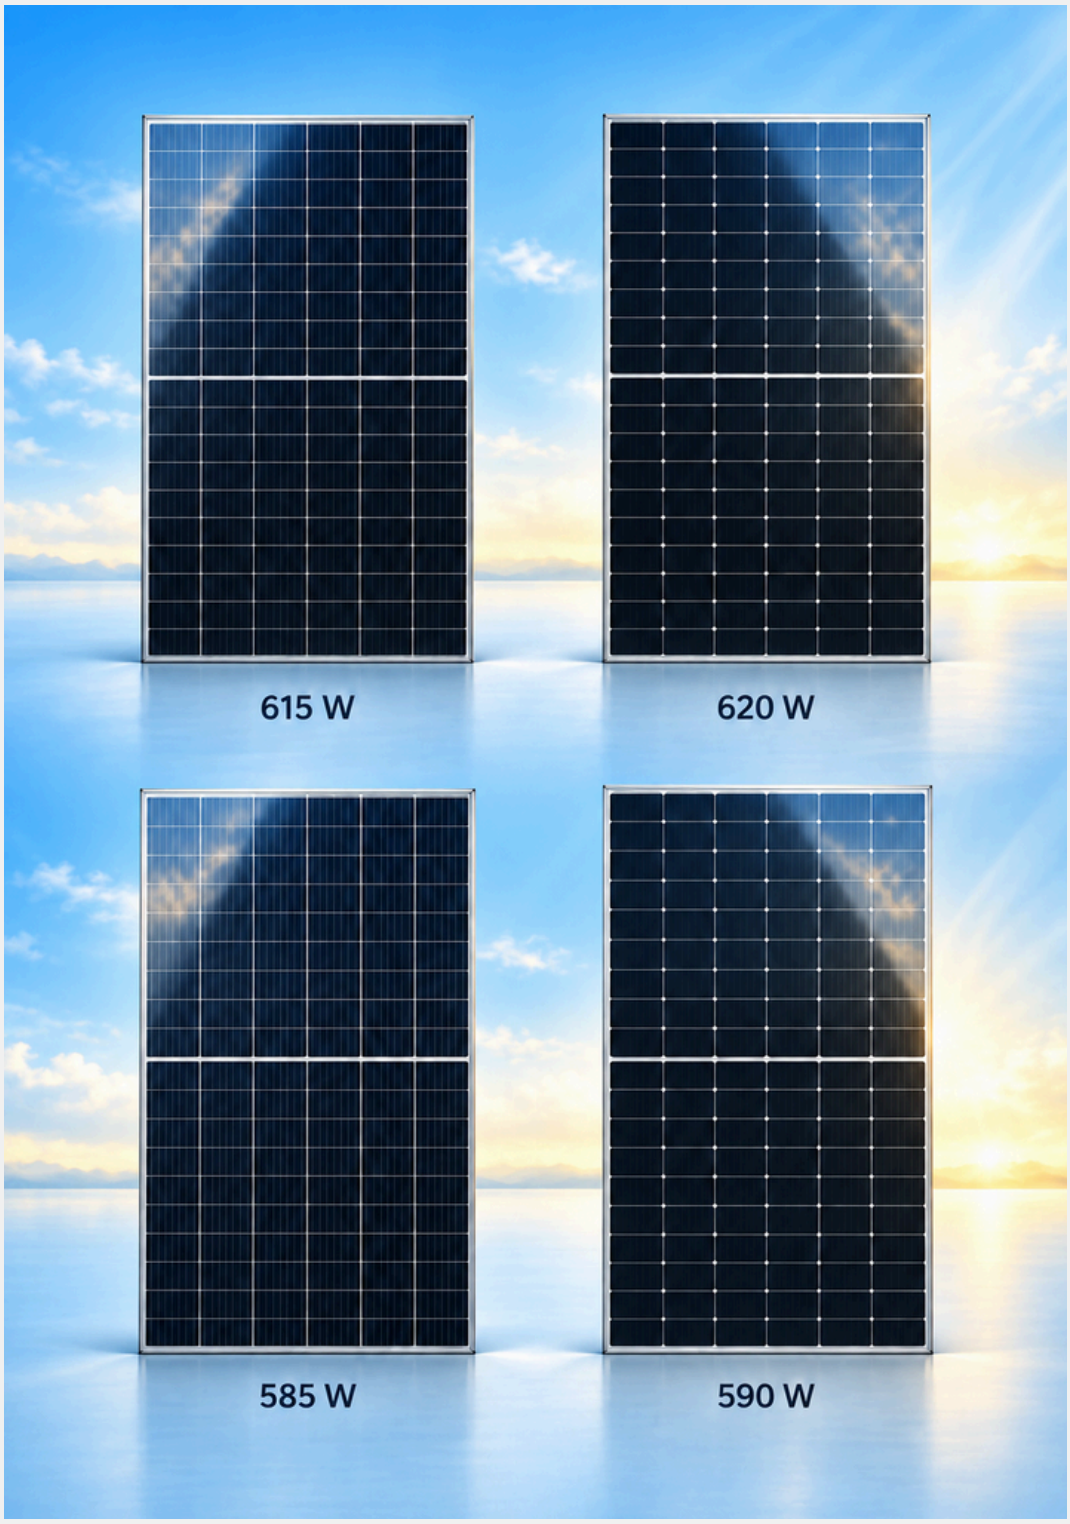

CONDICIONES DE ENVÍO Y TRANSPORTE

RUTA MARÍTIMA

RÓTERDAM → MARIEL, CUBA

FLETE MARÍTIMO

Tipo de contenedor	Flete marítimo
20 DC	A solicitud
40' HC	A solicitud

NAVIERAS Y TRÁNSITOS ESTIMADOS

El transporte marítimo puede organizarse con Nirint Shipping, según disponibilidad y calendario de salidas.

CONDICIONES DE ENVÍO Y TRANSPORTE

Naviera	Tiempo de tránsito estimado
Nirint Shipping	Aproximadamente 22 días

Los tiempos de tránsito son estimados y pueden variar debido a modificaciones del itinerario, operaciones portuarias, transbordos u otras circunstancias relacionadas con el transporte.

CONDICIONES DE ENTREGA

Incoterms® 2020

AVISO IMPORTANTE SOBRE EL ENVÍO

Las tarifas de flete marítimo indicadas se basan en las condiciones actualmente disponibles y se proporcionan únicamente como referencia. Los costos reales de transporte pueden variar debido a cambios en tarifas, recargos y disponibilidad de buques o contenedores.

Los costos finales del flete, la naviera disponible y la fecha de salida confirmada se establecerán al realizar el pedido o reservar el transporte.

SiRo T Efficient

GCL

NT10/72GDF

580-605W

N-type Bifacial Double Glass Module

TOPCon 1.0 Tech



Low degradation ensures reliable output over the module's lifetime

High bifaciality for superior rear-side power output

Excellent temperature coefficient ensures power generation in high temperature areas

Enhanced low-light response ensures stable outputunder low-light conditions

Sound quality management and product certification system

IEC61215:2021 / IEC61730:2023

ISO9001:2015: quality management system

ISO14001:2015: environmental management system

ISO45001:2018: Occupational Health and Safety Management System

NT10/72GDF | TOPCon 1.0 Tech


Maximum Power Output **605W** | Maximum Module Efficiency **23.42%**


Mechanical Data

Cell Type	N-Type Monocrystalline Solar Cell
Number of Cells	144 Cells (6×24)
Dimensions of Module	2278×1134×30mm (89.68×44.65×1.18 inches)
Weight	31.1kg
Front/Back Side Glass	2.0mm (0.08 inches), Anti-ReflectionCoating 2.0mm (0.08 inches), HeatStrengthenedGlass
Frame	Anodized aluminium alloy
J-Box	IP68 Rated, 3 diodes
Cable	4.0mm², +300/-200mm (lengthcanbe customized)
Connector	GCL-01/GCL-02/MC4-EVO2/others
Packaging Configuration	Module per box: 36 pieces Module per 40' HQ: 720 pieces


Module Dimension

Tolerance: Length:±2mm Width:±2mm

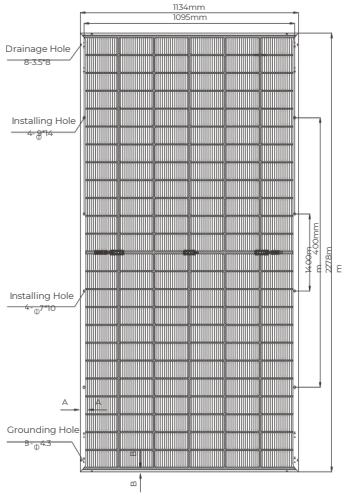



Long Frame
A-A



Short Frame
B-B

Electrical Specification (STC*)

* Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Maximum Power	Pmax (W)	580	585	590	595	600	605
Maximum Power Voltage	Vmp(V)	43.75	43.95	44.15	44.35	44.55	44.82
Maximum Power Current	Imp (A)	13.26	13.31	13.37	13.42	13.47	13.50
Open Circuit Voltage	Voc (V)	51.90	52.05	52.20	52.35	52.50	52.75
Short Circuit Current	Isc (A)	14.01	14.07	14.13	14.19	14.25	14.28
Module Efficiency	(%)	22.45	22.65	22.84	23.03	23.23	23.42
Power Output Guarantee	(%)	0~+3					
Temperature Coefficient of Isc	(Isc)	+0.045%/°C					
Temperature Coefficient of Voc	(Voc)	-0.25%/°C					
Temperature Coefficient of P	(Pmax)	-0.29%/°C					

Electrical Characteristics with Different Power Bin (Reference to 10% Irradiance Ratio)


Maximum Power	Pmax (W)	626.5	631.6	637.5	642.6	648.2	653.5
Maximum Power Voltage	Vmp(V)	43.75	43.95	44.15	44.35	44.55	44.82
Maximum Power Current	Imp (A)	14.32	14.37	14.44	14.49	14.55	14.58
Open Circuit Voltage	Voc (V)	51.90	52.05	52.20	52.35	52.50	52.75
Short Circuit Current	Isc (A)	15.13	15.20	15.26	15.33	15.39	15.42

Application Conditions

Operational Temperature	-40~+85℃
Maximum System Voltage	1500V DC
Max Series Fuse Rating	30A
Wind/ Snow Load	2400Pa/5400Pa*
Bifaciality	80±5%

*For more details please check the installation manual of GCLSI

Linear Performance Warranty

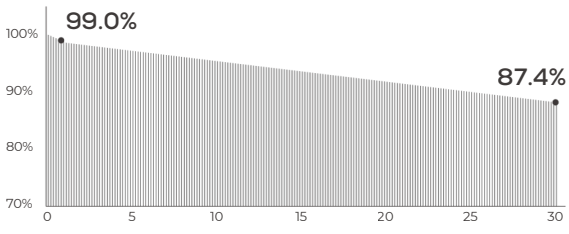

12 year Productwarranty

30 year Linearpower warranty

1% Firstyearpower attenuation

0.40% Annualdegradation over 30 years

SiRo T Efficient

GCL

NT12R/66GDF

630-650W

N-type Bifacial Double Glass Module

TOPCon 2.0 Tech

Designed with TOPCon 2.0 technology for higher power output and long-term reliability



- Low degradation ensures reliable output over the module's lifetime
- High bifaciality for superior rear-side power output
- Excellent temperature coefficient ensures power generation in high temperature areas
- Enhanced low-light response ensures stable outputunder low-light conditions

Sound quality management and product certification system

IEC61215 IEC61730

ISO9001: Quality Management System

ISO14001: Environmental Management System

ISO45001: Occupational Health and Safety Management System

IEC CE ISO

NT12R/66GDF | TOPCon 2.0 Tech


Maximum Power Output **650W** | Maximum Module Efficiency **24.06%**


Mechanical Data

Cell Type	N-Type Monocrystalline Solar Cell
Number of Cells	132 Cells (6×22)
Dimensions of Module	2382×1134×30mm (93.78×44.65×1.18 inches)
Weight	32.5 kg
Front/Back Side Glass	2.0mm (0.08 inches), Heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68 Rated, 3 diodes
Cable	4.0mm², +300/-200mm (length can be customized)
Connector	GCL-01/GCL-02/MC4-EVO2/others
Packaging Configuration	Module per box: 36 pieces Module per 40' HQ: 720 pieces


Module Dimension

Tolerance: Length:±2mm Width:±2mm

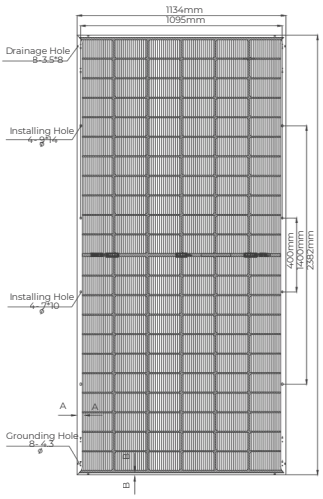



Long Frame
A-A



Short Frame
B-B

Electrical Specification (STC*)

* Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Maximum Power	Pmax (W)	630	635	640	645	650
Maximum Power Voltage	Vmp(V)	41.31	41.50	41.72	41.94	42.15
Maximum Power Current	Imp (A)	15.25	15.30	15.34	15.38	15.42
Open Circuit Voltage	Voc (V)	48.70	48.88	49.15	49.40	49.65
Short Circuit Current	Isc (A)	16.05	16.13	16.17	16.21	16.25
Module Efficiency	(%)	23.32	23.51	23.69	23.88	24.06
Power Output Guarantee	(%)			0~+3		
Temperature Coefficient of	(Isc)			+0.045%/°C		
Temperature Coefficient of	(Voc)			-0.25%/°C		
Temperature Coefficient of P	(Pmax)			-0.29%/°C		

Electrical Characteristics with Different Power Bin (Reference to 10% Irradiance Ratio)


Maximum Power	Pmax (W)	680.4	685.6	691.3	696.6	701.8
Maximum Power Voltage	Vmp(V)	41.31	41.50	41.72	41.94	42.15
Maximum Power Current	Imp (A)	16.47	16.52	16.57	16.61	16.65
Open Circuit Voltage	Voc (V)	48.70	48.88	49.15	49.40	49.65
Short Circuit Current	Isc (A)	17.33	17.42	17.46	17.51	17.55

Application Conditions

Operational Temperature	-40~+85℃
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A
Wind/ Snow Load	2400Pa/5400Pa*
Bifaciality	80±5%

*For more details please check the installation manual of GCLSI

Linear Performance Warranty

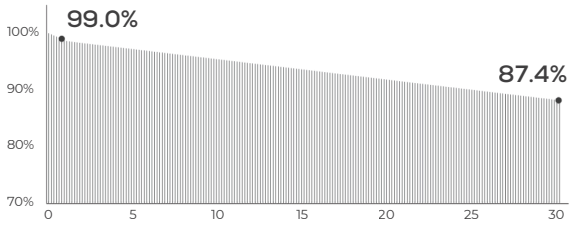

12 year Productwarranty

30 year Linearpower warranty

1% Firstyearpower attenuation

0.40% Annualdegradation over 30 years



Nueva Cultura Latina S.U.R.L.

Productos de calidad, precios competitivos y servicio confiable.

SOLICITE UNA COTIZACIÓN

¿Le interesan nuestros productos? Contacte a NCL para consultar precios actuales, disponibilidad, condiciones mayoristas y oportunidades de distribución.

Datos de la empresa

Nueva Cultura Latina S.U.R.L.

Tel.: +49 178 7287828

Sitio web: www.nuevaculturalatina.com

Correo electrónico: oferta@nuevaculturalatina.com